Product Code
00-4925-F5-M1

Installation Instructions
3D File
Photometry

Bravo

Manel Lluscà


Pendant Bravo LED 40.7W 3000K Gold 4256lm

Technical features

Luminaire total power: 40.7W
Real lumens: 4256
Real lm/W: 105
Correlated Colour Temperature (CCT): 3000K
Lens / reflector angle: FLOOD 83°
UGR: <=16
Structure material: Aluminium
Structure finish: Gold
Diffuser material: Acrylic
Diffuser finish: Opal
Voltage / frequency: 100-240V ~ 50/60Hz
Power Factor: 0.90
Useful life: 50,000h L80B20
Warranty: 5 years
Easily recyclable luminaire

IP20 LED F A G



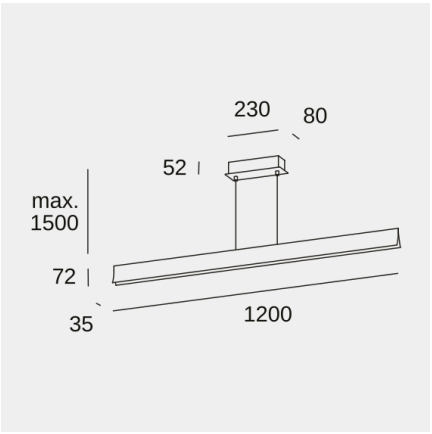


Luminotechnic features

CRI: 80
MacAdam steps: 3
Photobiological risk: RG1

UGR	
S=0.250	
Ceiling / cavity	0.7
Walls	0.5
Working Plane	0.2
Room dimensions	X=4H, Y=8H
UGR crosswise	7.2
UGR lengthwise	4.5

Lampholder	Quantity	Light source power (W)	Correlated Colour Temperature (CCT)
LED	1	39.3W	3000K

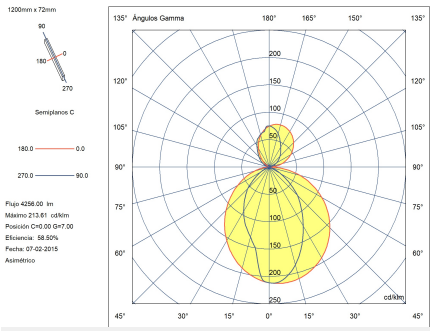

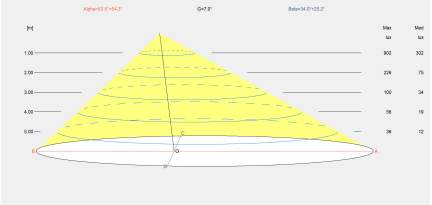


Image may not match reference. LedsC4 reserves the right to amend any of the product's components. The data related to flux, power and colour temperature may be subject to changes made by the manufacturer.

ledsc4@ledsc4.com
LedsC4, Afores s/n 25750 Torà (Lleida) Spain +34 973 468 100

Product Code
00-4925-F5-M1

Installation Instructions
3D File
Photometry

Bravo

Manel Lluscà

Pendant Bravo LED 40.7W 3000K Gold 4256lm

Logistics

x 4

Net weight (kg): 1.88
Packaged weight (kg): 2.6
Packaging: 150mm x 95mm x 1270mm

Light application



Image may not match reference. LedsC4 reserves the right to amend any of the product's components. The data related to flux, power and colour temperature may be subject to changes made by the manufacturer.

ledsc4@ledsc4.com
LedsC4, Afores s/n 25750 Torà (Lleida) Spain +34 973 468 100