Product Code
CF4A-00V9AZDUEF

Installation Instructions
3D File
Photometry
Revit (BIM)

Circular Outward ø600 Surface

Benedito Design

Pendant Circular Outward ø600 Surface LED 38W 2700K DALI-2 Gold 1778lm

Technical features

Luminaire total power: 38W
Real lumens: 1778
Real lm/W: 47
Correlated Colour Temperature (CCT): 2700K
UGR: <=19
Structure finish: Gold
Diffuser material: Polycarbonate
Diffuser finish: Opal
Driver Brand: MEANWELL
Voltage / frequency: 100-240V ~ 50/60Hz
Dimming protocol: DALI-2
Power Factor: 0.90
Useful life: 50,000h L80B20
Warranty: 5 years
Easily recyclable luminaire

IP20


Luminotechnic features

Luminance C0°G65°: 1143
Luminance C90°G65°: 1032
CRI: 92
MacAdam steps: 3
Photobiological risk: RG0

UGR	
S=0.250	
Ceiling / cavity	0.7
Walls	0.5
Working Plane	0.2
Room dimensions	X=4H, Y=8H
UGR crosswise	17.9
UGR lengthwise	17.7

Lampholder	Quantity	Light source power (W)	Correlated Colour Temperature (CCT)
LED	1	31.7W	2700K



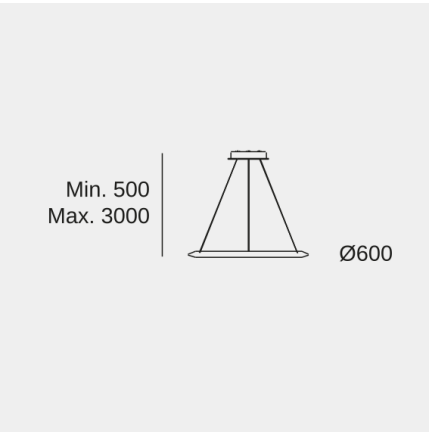

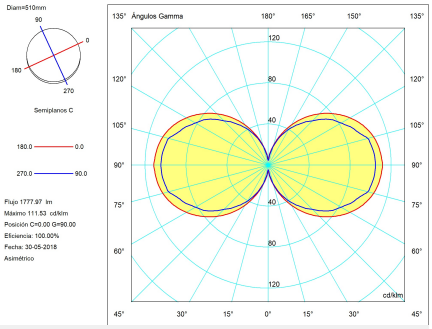


Image may not match reference. LedsC4 reserves the right to amend any of the product's components. The data related to flux, power and colour temperature may be subject to changes made by the manufacturer.

ledsc4@ledsc4.com
LedsC4, Afores s/n 25750 Torà (Lleida) Spain +34 973 468 100

Circular Outward ø600 Surface

Benedito Design

Pendant Circular Outward ø600 Surface LED 38W 2700K DALI-2 Gold 1778lm

Logistics

x 1

Net weight (kg): 3.4
Packaged weight (kg): 5.42
Packaging: 700mm x 695mm x 100mm

Image may not match reference. LedsC4 reserves the right to amend any of the product's components. The data related to flux, power and colour temperature may be subject to changes made by the manufacturer.

ledsc4@ledsc4.com
LedsC4, Afores s/n 25750 Torà (Lleida) Spain +34 973 468 100