Product Code
CS4A-00V9AZDU05

Installation Instructions
3D File
Photometry
Revit (BIM)


Circular Downward ø600 Surface

Benedito Design


Pendant Circular Downward ø600 Surface LED 39W 2700K DALI-2 Black 1209lm

Technical features

Luminaire total power: 39W
Real lumens: 1209
Real lm/W: 31
Correlated Colour Temperature (CCT): 2700K
Lens / reflector angle: HORIZONTAL 121°
UGR: <=19
Structure finish: Black
Diffuser material: Polycarbonate
Diffuser finish: Opal
Driver Brand: MEANWELL
Voltage / frequency: 100-240V ~ 50/60Hz
Dimming protocol: DALI-2
Power Factor: 0.90
Useful life: 50,000h L80B20
Warranty: 5 years
Easily recyclable luminaire





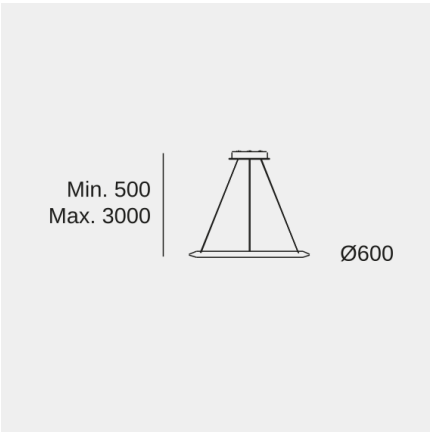


Luminotechnic features

Luminance C0°G65°: 1382
Luminance C90°G65°: 1382
CRI: 92
MacAdam steps: 3
Photobiological risk: RG0

UGR	
S=0.250	
Ceiling / cavity	0.7
Walls	0.5
Working Plane	0.2
Room dimensions	X=4H, Y=8H
UGR crosswise	18.1
UGR lengthwise	18.1

Lampholder	Quantity	Light source power (W)	Correlated Colour Temperature (CCT)
LED	1	31.7W	2700K

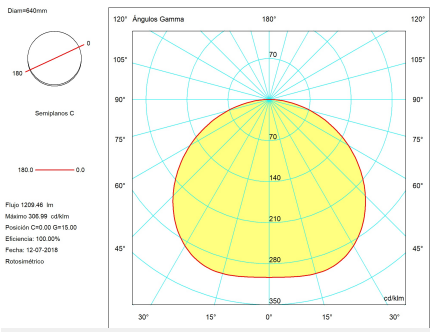

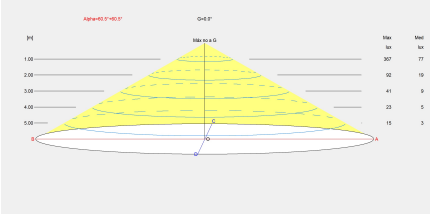


Image may not match reference. LedsC4 reserves the right to amend any of the product's components. The data related to flux, power and colour temperature may be subject to changes made by the manufacturer.

ledsc4@ledsc4.com
LedsC4, Afores s/n 25750 Torà (Lleida) Spain +34 973 468 100

Circular Downward ø600 Surface

Benedito Design

Pendant Circular Downward ø600 Surface LED 39W 2700K DALI-2 Black 1209lm

Logistics

x 1

Net weight (kg): 3.4
Packaged weight (kg): 5.42
Packaging: 700mm x 695mm x 100mm

Image may not match reference. LedsC4 reserves the right to amend any of the product's components. The data related to flux, power and colour temperature may be subject to changes made by the manufacturer.

ledsc4@ledsc4.com
LedsC4, Afores s/n 25750 Torà (Lleida) Spain +34 973 468 100