Product Code
00-8302-05-M1

Installation Instructions
3D File
Photometry
Revit (BIM)

Dew Horitzontal 995mm Surface


Yonoh


Pendant Dew Horitzontal 995mm Surface LED 13W 2700K DALI/PUSH Black 782lm

Technical features

Luminaire total power: 13W
Real lumens: 782
Real lm/W: 60
Correlated Colour Temperature (CCT): 2700K
UGR: <=19
Structure material: Aluminium
Structure finish: Black
Diffuser material: Polycarbonate
Diffuser finish: Opal
Driver Brand: MEANWELL
Voltage / frequency: 220-240V/50-60Hz
Dimming protocol: DALI/PUSH
Power Factor: 0.94
THD%: 20
Useful life: 50,000h L80B20
Warranty: 5 years
Easily recyclable luminaire

IP20

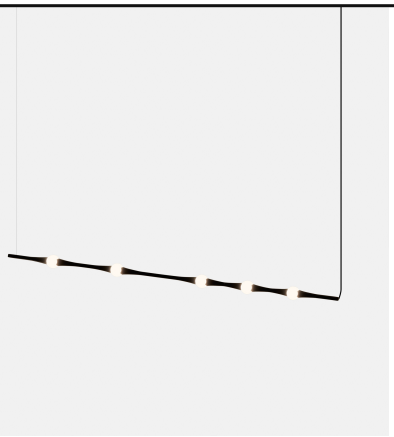

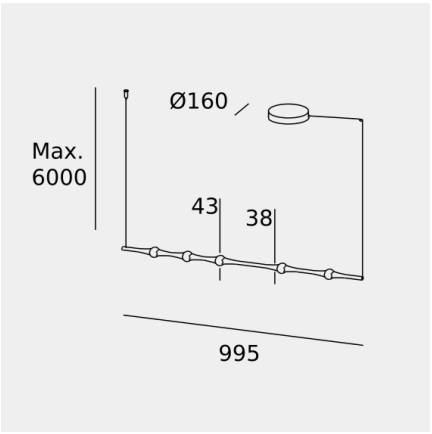

Luminotechnic features

Luminance C0°G65°: 2359
Luminance C90°G65°: 2320
CRI: 92
MacAdam steps: 3
Photobiological risk: RG1

UGR	
S=0.250	
Ceiling / cavity	0.7
Walls	0.5
Working Plane	0.2
Room dimensions	X=4H, Y=8H
UGR crosswise	17.9
UGR lengthwise	17.8

Lampholder	Quantity	Light source power (W)	Correlated Colour Temperature (CCT)
LED	1	10.5W	2700K

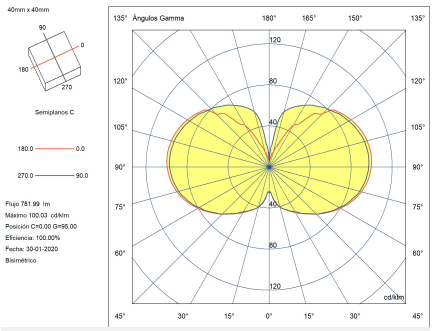


Image may not match reference. LedsC4 reserves the right to amend any of the product's components. The data related to flux, power and colour temperature may be subject to changes made by the manufacturer.

ledsc4@ledsc4.com
LedsC4, Afores s/n 25750 Torà (Lleida) Spain +34 973 468 100

Product Code
00-8302-05-M1

Installation Instructions
3D File
Photometry
Revit (BIM)

Dew Horitzontal 995mm Surface

Yonoh

Pendant Dew Horitzontal 995mm Surface LED 13W 2700K DALI/PUSH Black 782lm

Logistics

x 4

Net weight (kg): 1.11
Packaged weight (kg): 2.66
Packaging: 225mm x 100mm x 1235mm

Light application



Image may not match reference. LedsC4 reserves the right to amend any of the product's components. The data related to flux, power and colour temperature may be subject to changes made by the manufacturer.

ledsc4@ledsc4.com
LedsC4, Afores s/n 25750 Torà (Lleida) Spain +34 973 468 100