Product Code
05-7742-05-05


Installation Instructions
3D File
Photometry
Revit (BIM)

H

Benedito Design


Surface-mounted wall light H LED 16.3W 2700K ON-OFF Black 553lm



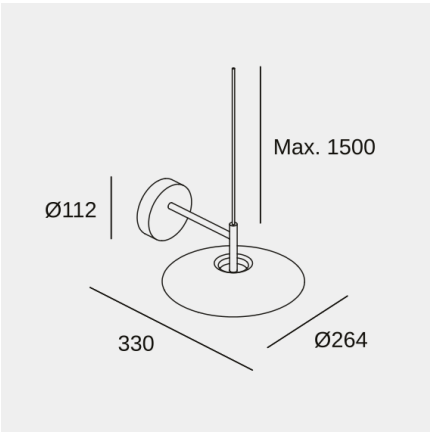

Technical features

Luminaire total power: 16.3W
Real lumens: 553
Real lm/W: 34
Correlated Colour Temperature (CCT): 2700K
Lens / reflector angle: FLOOD 73°
Structure material: Steel
Structure finish: Black
Diffuser material: Acrylic
Diffuser finish: Sandblasted
Driver Brand: HEP
Voltage / frequency: 100-277V ~ 50/60Hz
Dimming protocol: ON-OFF
Power Factor: 0.90
Useful life: 50,000h L80B20
Warranty: 5 years
Easily recyclable luminaire



Luminotechnic features

CRI: 92
MacAdam steps: 3
Photobiological risk: RG1
UGR crosswise: 22.3
UGR lengthwise: 22.2

Lampholder	Quantity	Light source power (W)	Correlated Colour Temperature (CCT)
LED	1	14.9W	2700K

Image may not match reference. LedsC4 reserves the right to amend any of the product's components. The data related to flux, power and colour temperature may be subject to changes made by the manufacturer.

ledsc4@ledsc4.com
LedsC4, Afores s/n 25750 Torà (Lleida) Spain +34 973 468 100

H

Benedito Design

Surface-mounted wall light H LED 16.3W 2700K ON-OFF Black 553lm

Logistics

x 4

Net weight (kg): 1.32
Packaged weight (kg): 1.98
Packaging: 370mm x 285mm x 170mm

Image may not match reference. LedsC4 reserves the right to amend any of the product's components. The data related to flux, power and colour temperature may be subject to changes made by the manufacturer.