Product Code
00-7742-05-05

Installation Instructions
3D File
Photometry
Revit (BIM)

H Surface

Benedito Design

Pendant H Surface LED 27.7W 2700K ON-OFF Black 1207lm

Technical features

Luminaire total power: 27.7W
Real lumens: 1328
Real lm/W: 48
Correlated Colour Temperature (CCT): 2700K
Lens / reflector angle: HORIZONTAL 142°
Structure material: Steel
Structure finish: Black
Diffuser material: Acrylic
Diffuser finish: Sandblasted
Voltage / frequency: 220-240V/50-60Hz
Dimming protocol: ON-OFF
Power Factor: 0.95
Useful life: 50,000h L80B20
Warranty: 5 years
Easily recyclable luminaire

IP20

Luminotechnic features

CRI: 92
MacAdam steps: 3
Photobiological risk: RG1, RG2

UGR	
S=0.250	
Ceiling / cavity	0.7
Walls	0.5
Working Plane	0.2
Room dimensions	X=4H, Y=8H
UGR crosswise	22.7
UGR lengthwise	22.7

Lampholder	Quantity	Light source power (W)	Correlated Colour Temperature (CCT)
LED	1	25.2W	2700K



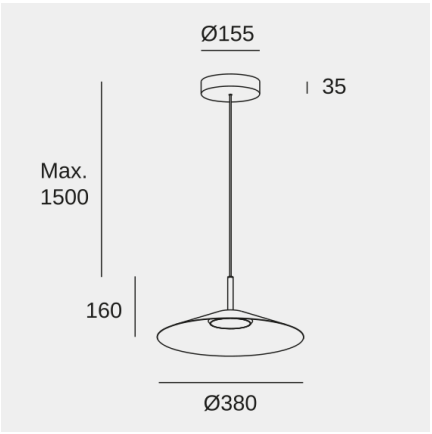


Image may not match reference. LedsC4 reserves the right to amend any of the product's components. The data related to flux, power and colour temperature may be subject to changes made by the manufacturer.

LedsC4

Product Code
00-7742-05-05

Installation Instructions
3D File
Photometry
Revit (BIM)

H Surface

Benedito Design

Pendant H Surface LED 27.7W 2700K ON-OFF Black 1207lm

Logistics

x 4

Net weight (kg): 1.9
Packaged weight (kg): 3.58
Packaging: 460mm x 460mm x 205mm

Light application



Image may not match reference. LedsC4 reserves the right to amend any of the product's components. The data related to flux, power and colour temperature may be subject to changes made by the manufacturer.

ledsc4@ledsc4.com
LedsC4, Afores s/n 25750 Torà (Lleida) Spain +34 973 468 100