Product Code
05-8510-05-05

Installation Instructions
3D File
Photometry
Dialux | ULD
Revit (BIM)


Hall Slim Reader

Nahtrang Studio


Reading lights Hall Slim Reader LED 3.5W 2700K ON-OFF Black 150lm

Technical features

Luminaire total power: 3.5W
Real lumens: 150
Real lm/W: 43
Correlated Colour Temperature (CCT): 2700K
Lens / reflector angle: MEDIUM 26°
Structure material: Aluminium
Structure finish: Black
Driver Brand: HEP
Voltage / frequency: 100-240V ~ 50/60Hz
Dimming protocol: ON-OFF
Power Factor: 0.50
THD%: 86.5
Useful life: 50,000h L80B20
Warranty: 5 years
Easily recyclable luminaire





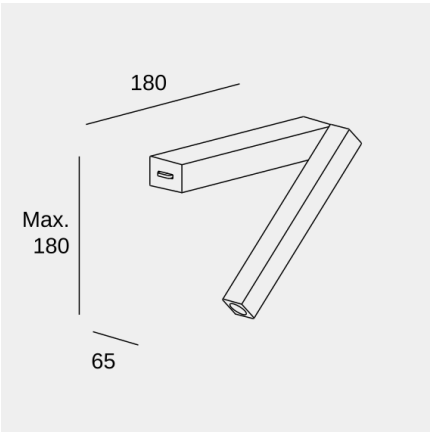

Luminotechnic features

TM30 RG: 99
TM30 RF: 92
CRI: 92
MacAdam steps: 3
Photobiological risk: RG2
UGR crosswise: 24.6
UGR lengthwise: 24.6

Lampholder	Quantity	Light source power (W)	Correlated Colour Temperature (CCT)
LED	1	2W	2700K

Image may not match reference. LedsC4 reserves the right to amend any of the product's components. The data related to flux, power and colour temperature may be subject to changes made by the manufacturer.

ledsc4@ledsc4.com
LedsC4, Afores s/n 25750 Torà (Lleida) Spain +34 973 468 100

Hall Slim Reader

Nahtrang Studio

Reading lights Hall Slim Reader LED 3.5W 2700K ON-OFF Black 150lm

Logistics

x 20

Net weight (kg): 0.43
Packaged weight (kg): 0.54
Packaging: 225mm x 70mm x 116mm

Image may not match reference. LedsC4 reserves the right to amend any of the product's components. The data related to flux, power and colour temperature may be subject to changes made by the manufacturer.