Product Code
00-6452-93-F9

3D File
Photometry
Dialux | ULD
Revit (BIM)

# Ilargi Ø230

Iratzoki-Lizaso

Pendant Ilargi Ø230 LED 11.8W 2700K PHASE CUT Light wood 716lm

## Technical features

Luminaire total power: 11.8W
Real lumens: 716
Real lm/W: 61
Correlated Colour Temperature (CCT): 2700K
UGR: <=19
Structure material: Wood, Steel
Structure finish: Light wood
Diffuser material: Glass
Diffuser finish: Opal
Driver Brand: HEP
Voltage / frequency: 220-240V/50-60Hz
Dimming protocol: PHASE CUT
Power Factor: 0.90
THD%: 20
Useful life: 50,000h L80B20
Warranty: 5 years
Easily recyclable luminaire

IP20

## Luminotechnic features

Luminance C0°G65°: 1131
Luminance C90°G65°: 1131
CRI: 80
MacAdam steps: 3
Photobiological risk: RG2

| UGR | |
|---|---|
| S=0.250 | |
| Ceiling / cavity | 0.7 |
| Walls | 0.5 |
| Working Plane | 0.2 |
| Room dimensions | X=4H, Y=8H |
| UGR crosswise | 16.2 |
| UGR lengthwise | 16.2 |

| Lampholder | Quantity | Light source power (W) | Correlated Colour Temperature (CCT) |
|---|---|---|---|
| LED | 1 | 8.5W | 2700K |



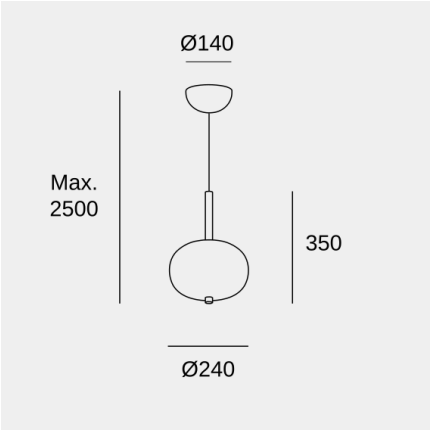








Image may not match reference. LedsC4 reserves the right to amend any of the product's components. The data related to flux, power and colour temperature may be subject to changes made by the manufacturer.



ledsc4@ledsc4.com
LedsC4, Afores s/n 25750 Torà (Lleida) Spain +34 973 468 100

LedsC4

Product Code
00-6452-93-F9

3D File
Photometry
Dialux | ULD
Revit (BIM)

# Ilargi Ø230

Iratzoki-Lizaso

Pendant Ilargi Ø230 LED 11.8W 2700K PHASE CUT Light wood 716lm

## Logistics

x 9

Net weight (kg): 1.74
Packaged weight (kg): 3.414
Packaging: 440mm x 230mm x 170mm

## Light application



Image may not match reference. LedsC4 reserves the right to amend any of the product's components. The data related to flux, power and colour temperature may be subject to changes made by the manufacturer.



ledsc4@ledsc4.com
LedsC4, Afores s/n 25750 Torà (Lleida) Spain +34 973 468 100