Product Code
00-A041-05-08

Installation Instructions
3D File
Photometry
Revit (BIM)

Levels 3 Bodies Ø420mm + Ø320mm + Ø220mm

Nahtrang Studio

Pendant Levels 3 Bodies Ø420mm + Ø320mm + Ø220mm LED 19W SW 2700-3000-4000K PHASE CUT Black 1255lm

Technical features

Luminaire total power: 19W
Real lumens: 1381 (3000K)
Real lm/W: 73
Correlated Colour Temperature (CCT): SW 2700-3000-4000K
Lens / reflector angle: HORIZONTAL 102°
Structure material: Steel
Structure finish: Black
Diffuser material: Glass
Diffuser finish: Green
Driver Brand: HEP
Voltage / frequency: 220-240V/50-60Hz
Dimming protocol: PHASE CUT
Power Factor: NULL
Useful life: 50,000h L80B20
Warranty: 5 years
Easily recyclable luminaire

IP20

Luminotechnic features

CRI: 92
MacAdam steps: 3
Photobiological risk: RG1

Lampholder	Quantity	Light source power (W)
LED	1	17.2W



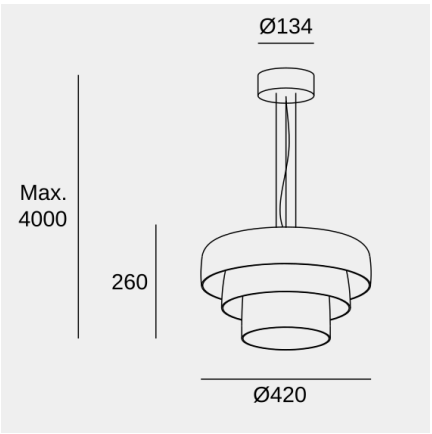


Image may not match reference. LedsC4 reserves the right to amend any of the product's components. The data related to flux, power and colour temperature may be subject to changes made by the manufacturer.

ledsc4@ledsc4.com
LedsC4, Afores s/n 25750 Torà (Lleida) Spain +34 973 468 100

Product Code
00-A041-05-08

Installation Instructions
3D File
Photometry
Revit (BIM)

Levels 3 Bodies Ø420mm + Ø320mm + Ø220mm

Nahtrang Studio

Pendant Levels 3 Bodies Ø420mm + Ø320mm + Ø220mm LED 19W SW 2700-3000-4000K PHASE CUT Black 1255lm

Logistics

x 1

Net weight (kg): 5.52
Packaged weight (kg): 8.7
Packaging: 600mm x 605mm x 700mm

Light application

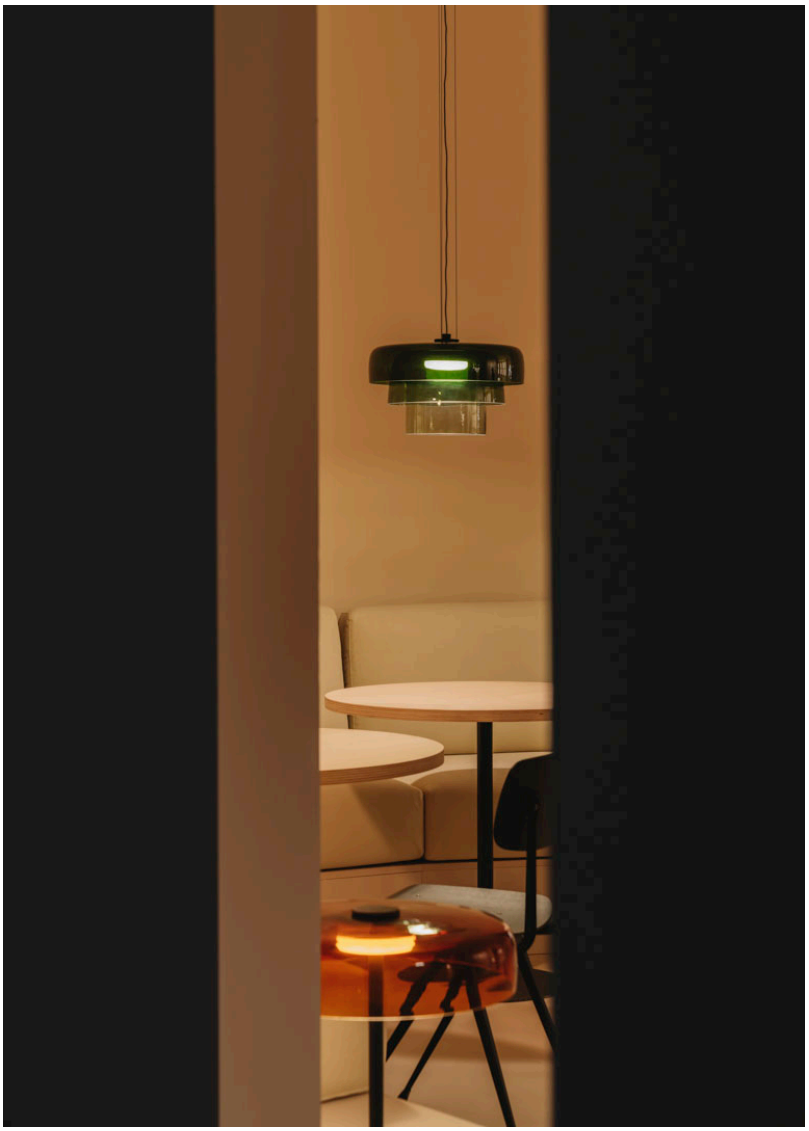


Image may not match reference. LedsC4 reserves the right to amend any of the product's components. The data related to flux, power and colour temperature may be subject to changes made by the manufacturer.

ledsc4@ledsc4.com
LedsC4, Afores s/n 25750 Torà (Lleida) Spain +34 973 468 100