Product Code
05-8363-05-05

Installation Instructions
3D File
Photometry
Dialux | ULD
Revit (BIM)

Trip triple ø300mm / ø460mm / ø300mm


Nahtrang Studio


Surface-mounted wall light Trip triple ø300mm / ø460mm / ø300mm E14 27W Black 621lm

Technical features

Luminaire total power: 27W
Lens / reflector angle: HORIZONTAL 125°
Structure material: Aluminium, Steel
Structure finish: Black
Diffuser material: Glass
Diffuser finish: Opal
Max. size of light bulb: 90/50 mm
Recommended light bulb: E14
Voltage / frequency: 100-240V ~ 50/60Hz
Warranty: 5 years
Easily recyclable luminaire

IP20 | RF 850ºC | A↑G

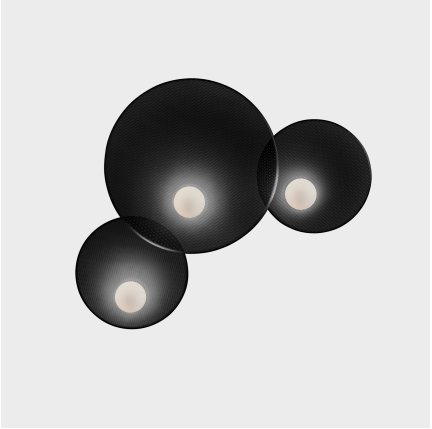

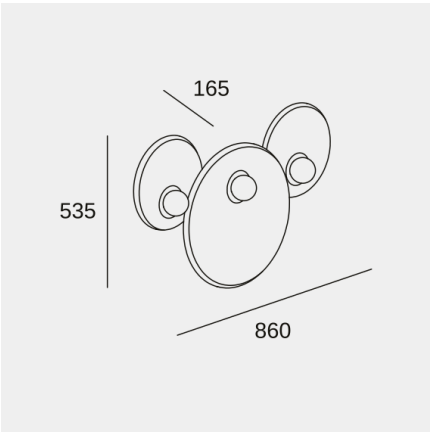

Luminotechnic features

Lampholder	Quantity	Light source power (W)	Correlated Colour Temperature (CCT)
E14	3	Max. power 9W	-

Image may not match reference. LedsC4 reserves the right to amend any of the product's components. The data related to flux, power and colour temperature may be subject to changes made by the manufacturer.

ledsc4@ledsc4.com
LedsC4, Afores s/n 25750 Torà (Lleida) Spain +34 973 468 100

Product Code
05-8363-05-05

Installation Instructions
3D File
Photometry
Dialux | ULD
Revit (BIM)

Trip triple ø300mm / ø460mm / ø300mm

Nahtrang Studio

Surface-mounted wall light Trip triple ø300mm / ø460mm / ø300mm E14 27W Black 621lm

Logistics

x 1

Net weight (kg): 1.98
Packaged weight (kg): 5.06
Packaging: 520mm x 530mm x 290mm

Image may not match reference. LedsC4 reserves the right to amend any of the product's components. The data related to flux, power and colour temperature may be subject to changes made by the manufacturer.

ledsc4@ledsc4.com
LedsC4, Afores s/n 25750 Torà (Lleida) Spain +34 973 468 100