Product Code
00-A154-05-M1

Installation Instructions
3D File
Photometry
Revit (BIM)

Configurator

# Tubs Modular Double Arch

Nahtrang Studio

Pendant Tubs Modular Double Arch LED 74.3W 2700K ON-OFF Black 5906lm

## Technical features


Luminaire total power: 74.3W
Real lumens: 6497
Real lm/W: 87
Correlated Colour Temperature (CCT): 2700K
Structure material: Aluminium
Structure finish: Black
Diffuser material: Methacrylate
Diffuser finish: Opal
Driver Brand: INVENTRONICS
Voltage / frequency: 220-240V/50-60Hz
Dimming protocol: ON-OFF
Power Factor: NULL
Useful life: 50,000h L80B20
Warranty: 5 years
Easily recyclable luminaire

IP20 | 360° | LED | DRIVER | D (A↑G) | 87x244

## Luminotechnic features

CRI: 92
MacAdam steps: 3
Photobiological risk: RG0

| Lampholder | Quantity | Light source power (W) | Correlated Colour Temperature (CCT) |
|---|---|---|---|
| LED | 1 | 71.2W | 2700K |

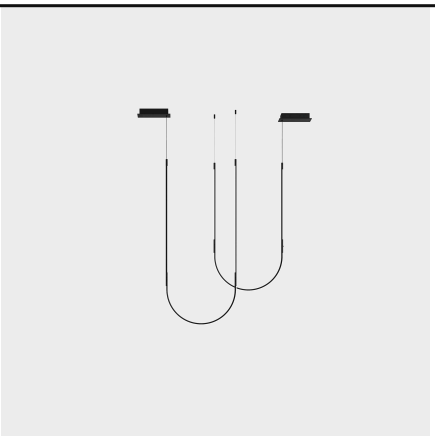

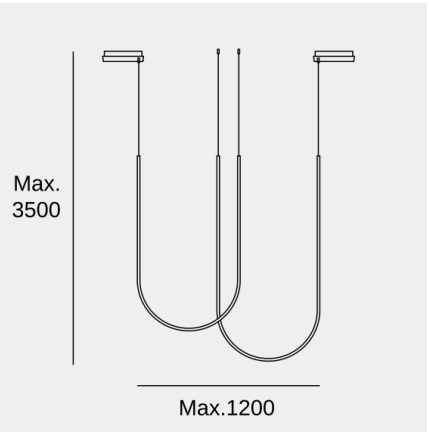



Image may not match reference. LedsC4 reserves the right to amend any of the product's components. The data related to flux, power and colour temperature may be subject to changes made by the manufacturer.



ledsc4@ledsc4.com
LedsC4, Afores s/n 25750 Torà (Lleida) Spain +34 973 468 100

LedsC4

Product Code
00-A154-05-M1

Installation Instructions
3D File
Photometry
Revit (BIM)

Configurator

# Tubs Modular Double Arch

Nahtrang Studio

Pendant Tubs Modular Double Arch LED 74.3W 2700K ON-OFF Black 5906lm

## Logistics

x 1

Net weight (kg): 5.82
Packaged weight (kg): 8.78
Packaging: 981mm x 958mm x 95mm

## Light application

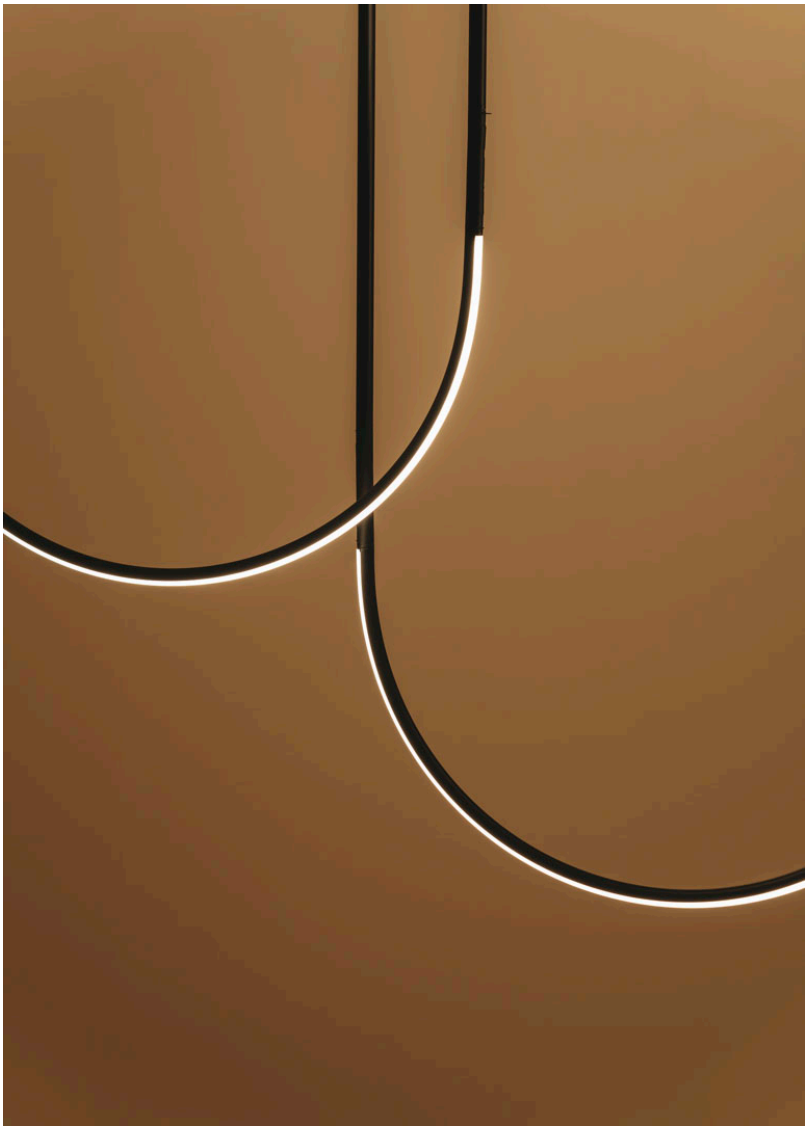


Image may not match reference. LedsC4 reserves the right to amend any of the product's components. The data related to flux, power and colour temperature may be subject to changes made by the manufacturer.



ledsc4@ledsc4.com
LedsC4, Afores s/n 25750 Torà (Lleida) Spain +34 973 468 100