Product Code
00-A140-05-M1

Installation Instructions
3D File
Photometry
Revit (BIM)

Configurator


Tubs Modular Rectangular Horizontal


Nahtrang Studio


Pendant Tubs Modular Rectangular Horizontal LED 65.6W 2700K ON-OFF Black 5085lm

Technical features

Luminaire total power: 65.6W
Real lumens: 5594
Real lm/W: 85
Correlated Colour Temperature (CCT): 2700K
Structure material: Aluminium
Structure finish: Black
Diffuser material: Methacrylate
Diffuser finish: Opal
Driver Brand: INVENTRONICS
Voltage / frequency: 220-240V/50-60Hz
Dimming protocol: ON-OFF
Power Factor: NULL
Useful life: 50,000h L80B20
Warranty: 5 years
Easily recyclable luminaire



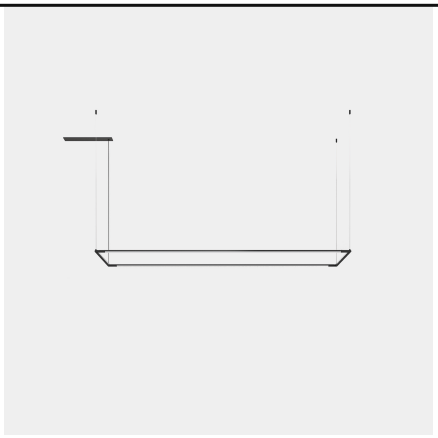

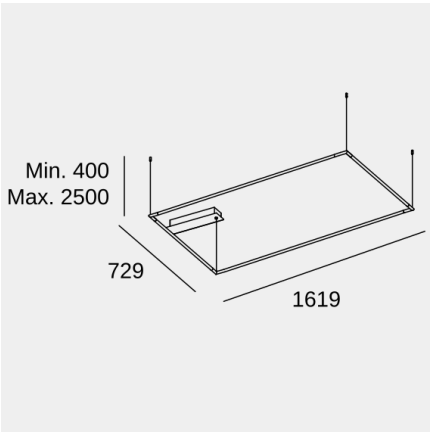

Luminotechnic features

CRI: 92
MacAdam steps: 3
Photobiological risk: RG0

Lampholder	Quantity	Light source power (W)	Correlated Colour Temperature (CCT)
LED	1	61.4W	2700K

Image may not match reference. LedsC4 reserves the right to amend any of the product's components. The data related to flux, power and colour temperature may be subject to changes made by the manufacturer.

ledsc4@ledsc4.com
LedsC4, Afores s/n 25750 Torà (Lleida) Spain +34 973 468 100

Product Code
00-A140-05-M1

Installation Instructions
3D File
Photometry
Revit (BIM)

Configurator

Tubs Modular Rectangular Horizontal

Nahtrang Studio

Pendant Tubs Modular Rectangular Horizontal LED 65.6W 2700K ON-OFF Black 5085lm

Logistics

x 1

Net weight (kg): 3.49
Packaged weight (kg): 5.27
Packaging: 2250mm x 175mm x 264mm

Image may not match reference. LedsC4 reserves the right to amend any of the product's components. The data related to flux, power and colour temperature may be subject to changes made by the manufacturer.

ledsc4@ledsc4.com
LedsC4, Afores s/n 25750 Torà (Lleida) Spain +34 973 468 100