Product Code
00-A168-05-M1

Installation Instructions
3D File
Photometry
Dialux | ULD
Revit (BIM)

Configurator


Tubs Modular Lineal Triangular


Nahtrang Studio


Pendant Tubs Modular Lineal Triangular LED 28W 2700K ON-OFF Black 2178lm

Technical features

Luminaire total power: 28W
Real lumens: 2396
Real lm/W: 86
Correlated Colour Temperature (CCT): 2700K
Structure material: Aluminium
Structure finish: Black
Diffuser material: Methacrylate
Diffuser finish: Opal
Driver Brand: INVENTRONICS
Voltage / frequency: 220-240V/50-60Hz
Dimming protocol: ON-OFF
Power Factor: NULL
Useful life: 50,000h L80B20
Warranty: 5 years
Easily recyclable luminaire



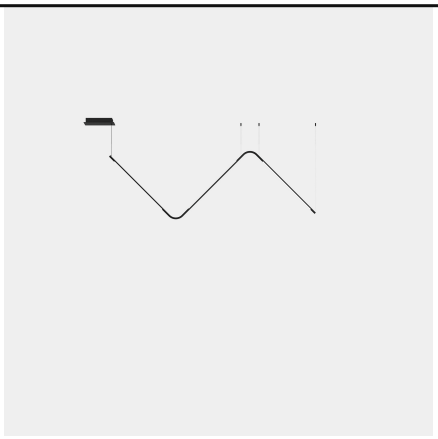

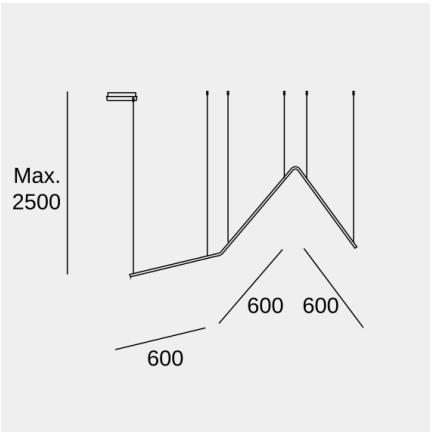

Luminotechnic features

CRI: 92
MacAdam steps: 3
Photobiological risk: RG0

Lampholder	Quantity	Light source power (W)	Correlated Colour Temperature (CCT)
LED	1	26.4W	2700K

Image may not match reference. LedsC4 reserves the right to amend any of the product's components. The data related to flux, power and colour temperature may be subject to changes made by the manufacturer.

ledsc4@ledsc4.com
LedsC4, Afores s/n 25750 Torà (Lleida) Spain +34 973 468 100

Tubs Modular Lineal Triangular

Nahtrang Studio

Pendant Tubs Modular Lineal Triangular LED 28W 2700K ON-OFF Black 2178lm

Logistics

x 1

Net weight (kg): 3.17
Packaged weight (kg): 3.7
Packaging: 1350mm x 175mm x 264mm

Image may not match reference. LedsC4 reserves the right to amend any of the product's components. The data related to flux, power and colour temperature may be subject to changes made by the manufacturer.