Product Code
00-A192-05-M1

Installation Instructions
3D File
Photometry
Revit (BIM)

Configurator

Tubs Modular Lineal & Track with 3 Downlights

Nahtrang Studio

Pendant Tubs Modular Lineal & Track with 3 Downlights LED 34.2W 2700K ON-OFF Black 1638lm

Technical features


Luminaire total power: 34.2W
Real lumens: 1802
Real lm/W: 53
Correlated Colour Temperature (CCT): 2700K
Structure material: Aluminium
Structure finish: Black
Diffuser material: Methacrylate
Diffuser finish: Opal
Driver Brand: INVENTRONICS
Voltage / frequency: 220-240V/50-60Hz
Dimming protocol: ON-OFF
Power Factor: NULL
Useful life: 50,000h L80B20
Warranty: 5 years
Easily recyclable luminaire

IP20 | 360° | LED | DRIVER | D (A↑G) | 87x244

Luminotechnic features

CRI: 92
MacAdam steps: 3
Photobiological risk: RG0, RG1

Lampholder	Quantity	Light source power (W)	Correlated Colour Temperature (CCT)
LED	1	33.5W	2700K

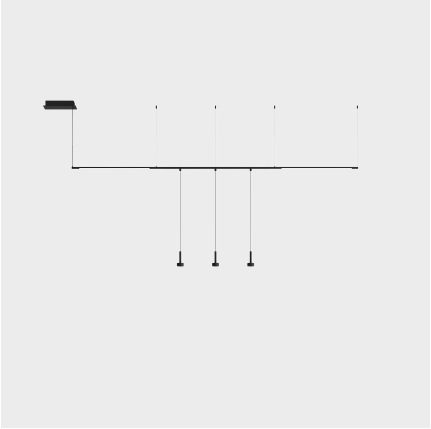

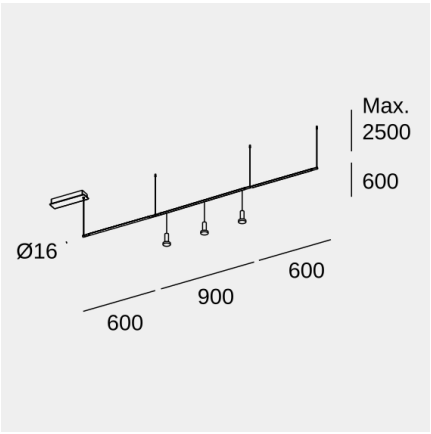


Image may not match reference. LedsC4 reserves the right to amend any of the product's components. The data related to flux, power and colour temperature may be subject to changes made by the manufacturer.

ledsc4@ledsc4.com
LedsC4, Afores s/n 25750 Torà (Lleida) Spain +34 973 468 100

Product Code
00-A192-05-M1

Installation Instructions
3D File
Photometry
Revit (BIM)

Configurator

Tubs Modular Lineal & Track with 3 Downlights

Nahtrang Studio

Pendant Tubs Modular Lineal & Track with 3 Downlights LED 34.2W 2700K ON-OFF Black 1638lm

Logistics

x 1

Net weight (kg): 4.1
Packaged weight (kg): 4.7
Packaging: 1650mm x 175mm x 264mm

Image may not match reference. LedsC4 reserves the right to amend any of the product's components. The data related to flux, power and colour temperature may be subject to changes made by the manufacturer.

ledsc4@ledsc4.com
LedsC4, Afores s/n 25750 Torà (Lleida) Spain +34 973 468 100