Ciro Wall
Installation Guide

PAGE 1/2

Before assembling and installing this product, carefully read the following (IF APPLICABLE):

- When installing multiple lamps; these fixtures must be wired in parallel in order to achieve the best possible light quality from each lamp. Wiring in series will result in the progressive loss of performance as the lamps move further away from the building power.
- Switch off power to the junction box before installing the lamp.
- Move light switch into the OFF position.
- When mounting to the ceiling, always use appropriate anchoring hardware.
- We recommend reading the guide before you begin installation.
- Installation Guides can be downloaded from Pablodesigns.com in the case this document is lost or damaged.
- Do not dissassemble, modify or try to repair this fixture! In order to receive technical assistance contact Pablo Designs. Any modification to the fixture will nullify the manufacturer's warranty.

(IF APPLICABLE) IMPORTANT INFORMATION ABOUT GLASS MATERIALS/FINISHES:

- Glass is a material which is fragile and can be easily damaged when mishandled.
- One of the main characteristics of Opal glass is that it is hand blown. Small imperfections like; air bubbles, thickness variations, or scratches can occur during the production process. These imperfections underline the craftsmanship, the exclusivity and authenticity of hand blown Opal glass.

CLEANING INSTRUCTIONS:

- Use only a soft cloth to clean this fixutre, dampened with water or mild cleanser if required, DO NOT use alcohol, solvents, or other abraisive cleaners, as this could damage the lamp finish.

TECHNICAL SPECIFICATIONS

Voltage: 120-240V 50/60Hz
Power Consumption: 6W
Color Temperature: 3000-1800K DTW
Luminosity: 330 Lumens
Luminaire efficacy: 55 Lumens/Watt
Color Rendition Index: 95 CRI
Cable Length 6′ (183cm)


SCAN FOR TRANSLATION
NACH ÜBERSETZUNG SUCHEN
NUMÉRISER POUR LA TRADUCTION
SCANSIONE PER TRADUZIONE

DEU **FRA** **ITA**

Contents

CIRO ARRIVES FULLY ASSEMBLED AND REQUIRES INSTALLATION.

LAMP BOX

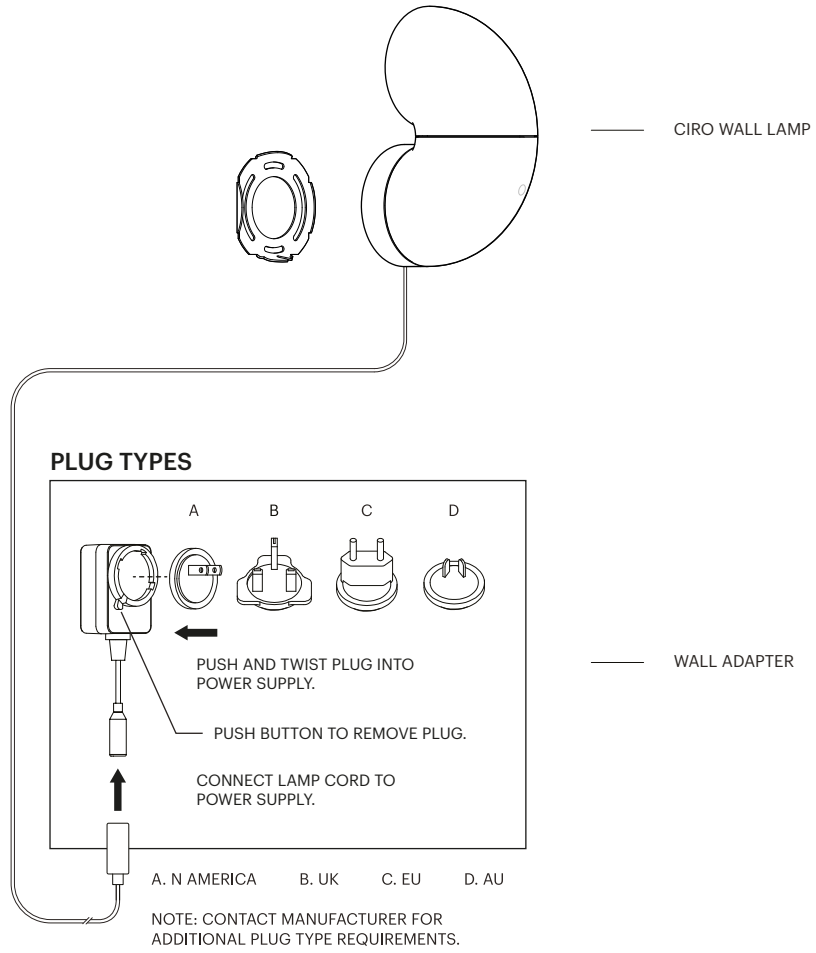


IF THERE ARE MISSING OR DAMAGED PARTS, PLEASE CONTACT US AS SOON AS POSSIBLE TO FILE A REPORT. CLEAR PHOTOS AND DESCRIPTIONS WILL ENABLE OUR CUSTOMER SERVICE TEAM TO QUICKLY AND EFFECTIVELY ADDRESS YOUR CLAIM.

(415) 865-5000
888 MARIN STREET
SAN FRANCISCO, CA 94124
INFO@PABLODESIGNS.COM
[**INFO@PABLODESIGNS.EU**]

Ciro Wall
Installation Guide


Pablo

1 Secure the MOUNT BRACKET to the wall surface using appropriate anchoring hardware, pay close attention that the arrow is pointing upward.

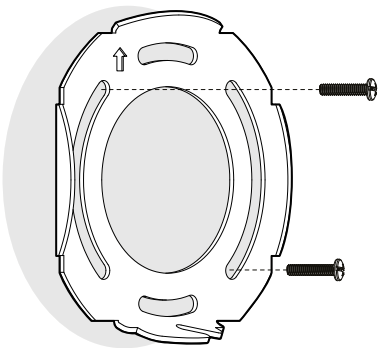


NOTE: THIS LAMP CANNOT BE INSTALLED OVER A JUNCTION BOX.


2 Secure the LAMP ASSEMBLY onto the MOUNT BRACKET. Ensure the LAMP ASSEMBLY fits over the upper portion of the MOUNT BRACKET. IMPORTANT! **ENSURE THE UPPER SECTION OF THE MOUNT BRACKET SEATS PROPERLY INTO THE BACK OF THE LAMP ASSEMBLY.**

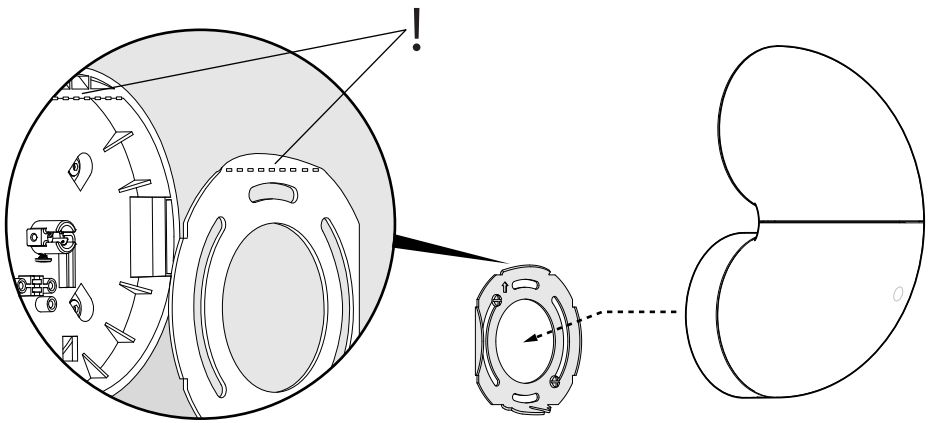

3 Secure the LAMP ASSEMBLY to the MOUNT BRACKET using the provided SET SCREW and HEX KEY.

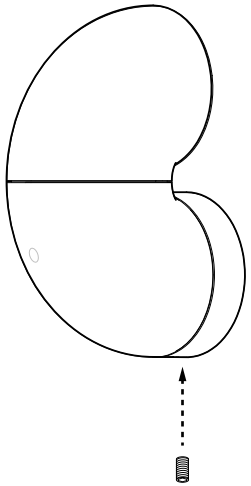

FEATURES

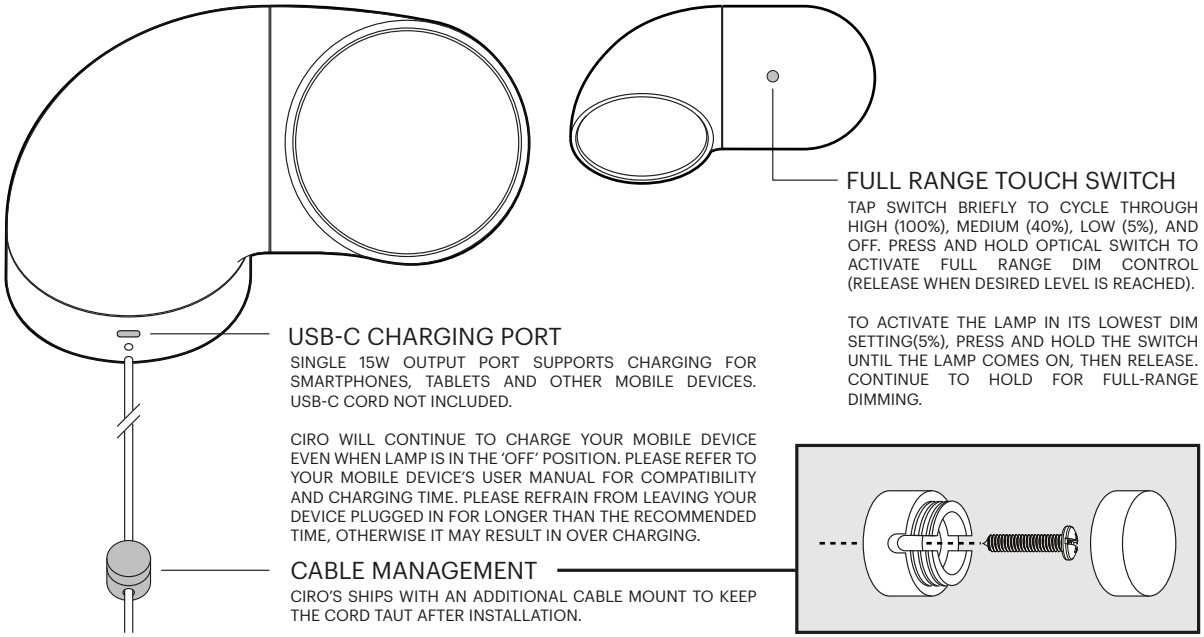

FULL RANGE TOUCH SWITCH

TAP SWITCH BRIEFLY TO CYCLE THROUGH HIGH (100%), MEDIUM (40%), LOW (5%), AND OFF. PRESS AND HOLD OPTICAL SWITCH TO ACTIVATE FULL RANGE DIM CONTROL (RELEASE WHEN DESIRED LEVEL IS REACHED).

TO ACTIVATE THE LAMP IN ITS LOWEST DIM SETTING(5%), PRESS AND HOLD THE SWITCH UNTIL THE LAMP COMES ON, THEN RELEASE. CONTINUE TO HOLD FOR FULL-RANGE DIMMING.

USB-C CHARGING PORT

SINGLE 15W OUTPUT PORT SUPPORTS CHARGING FOR SMARTPHONES, TABLETS AND OTHER MOBILE DEVICES. USB-C CORD NOT INCLUDED.

CIRO WILL CONTINUE TO CHARGE YOUR MOBILE DEVICE EVEN WHEN LAMP IS IN THE 'OFF' POSITION. PLEASE REFER TO YOUR MOBILE DEVICE'S USER MANUAL FOR COMPATIBILITY AND CHARGING TIME. PLEASE REFRAIN FROM LEAVING YOUR DEVICE PLUGGED IN FOR LONGER THAN THE RECOMMENDED TIME, OTHERWISE IT MAY RESULT IN OVER CHARGING.

CABLE MANAGEMENT

CIRO'S SHIPS WITH AN ADDITIONAL CABLE MOUNT TO KEEP THE CORD TAUT AFTER INSTALLATION.

ADJUSTABILITY

