
Ciro Table
User Guide



Pablo

PAGE 1/2

Before assembling and installing this product, carefully read the following (IF APPLICABLE):

- When installing multiple lamps; these fixtures must be wired in parallel in order to achieve the best possible light quality from each lamp. Wiring in series will result in the progressive loss of performance as the lamps move further away from the building power.
- Switch off power to the junction box before installing the lamp.
- Move light switch into the OFF position.
- When mounting to the ceiling, always use appropriate anchoring hardware.
- We recommend reading the guide before you begin installation.
- Installation Guides can be downloaded from Pablodesigns.com in the case this document is lost or damaged.
- Do not dissassemble, modify or try to repair this fixture! In order to recieve technical assistance contact Pablo Designs. Any modification to the fixture will nulify the manufacturer's warranty.

(IF APPLICABLE) IMPORTANT INFORMATION ABOUT GLASS MATERIALS/FINISHES:

- Glass is a material which is fragile and can be easily damaged when mishandled.
- One of the main characteristics of Opal glass is that it is hand blown. Small imperfections like; air bubbles, thickness variations, or scratches can occur during the production process. These imperfections underline the craftsmanship, the exclusivity and authenticity of hand blown Opal glass.

CLEANING INSTRUCTIONS:

- Use only a soft cloth to clean this fixutre, dampened with water or mild cleanser if required, DO NOT use alcohol, solvents, or other abraisive cleaners, as this could damage the lamp finish.

TECHNICAL SPECIFICATIONS

Voltage: 120-240V 50/60Hz
Power Consumption: 6W
Color Temperature: 3000-1800K DTW
Luminosity: 330 Lumens
Luminaire efficacy: 55 Lumens/Watt
Color Rendition Index: 95 CRI
Cable Length 6′ (183cm)


SCAN FOR TRANSLATION
NACH ÜBERSETZUNG SUCHEN
NUMÉRISER POUR LA TRADUCTION
SCANSIONE PER TRADUZIONE

DEU **FRA** **ITA**

Contents


CIRO ARRIVES FULLY ASSEMBLED AND READY FOR USE.

LAMP BOX

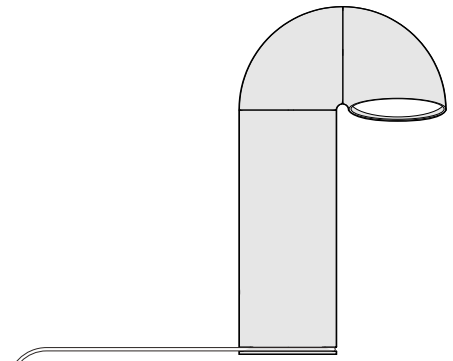

CIRO TABLE LAMP

PLUG TYPES

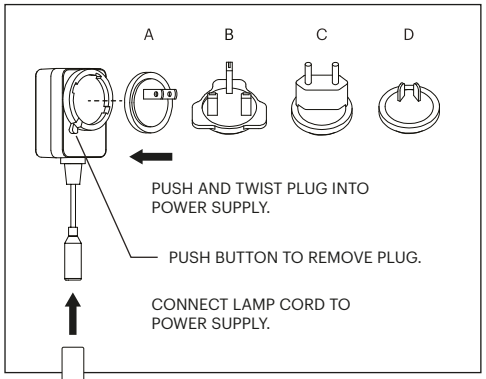


WALL ADAPTER

IF THERE ARE MISSING OR DAMAGED PARTS, PLEASE CONTACT US AS SOON AS POSSIBLE TO FILE A REPORT. CLEAR PHOTOS AND DESCRIPTIONS WILL ENABLE OUR CUSTOMER SERVICE TEAM TO QUICKLY AND EFFECTIVELY ADDRESS YOUR CLAIM.

(415) 865-5000
888 MARIN STREET
SAN FRANCISCO, CA 94124
INFO@PABLODESIGNS.COM
[**INFO@PABLODESIGNS.EU**]


Ciro Table
User Guide

PAGE 2/2



Pablo

FEATURES

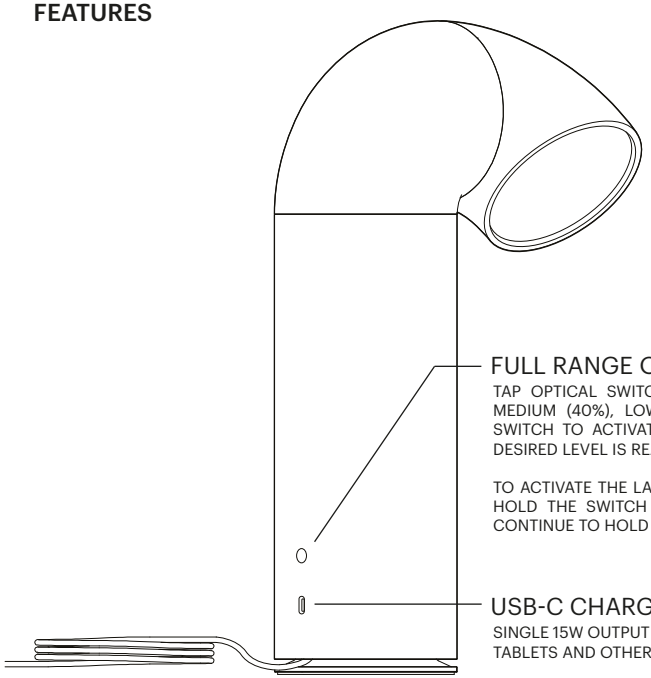

FULL RANGE OPTICAL SWITCH


TAP OPTICAL SWITCH BRIEFLY TO CYCLE THROUGH HIGH (100%), MEDIUM (40%), LOW (5%), AND OFF. PRESS AND HOLD OPTICAL SWITCH TO ACTIVATE FULL RANGE DIM CONTROL (RELEASE WHEN DESIRED LEVEL IS REACHED).

TO ACTIVATE THE LAMP IN ITS LOWEST DIM SETTING(5%), PRESS AND HOLD THE SWITCH UNTIL THE LAMP COMES ON, THEN RELEASE. CONTINUE TO HOLD FOR FULL-RANGE DIMMING.

USB-C CHARGING PORT

SINGLE 15W OUTPUT PORT SUPPORTS CHARGING FOR SMARTPHONES, TABLETS AND OTHER MOBILE DEVICES. USB-C CORD NOT INCLUDED.


CIRO WILL CONTINUE TO CHARGE YOUR MOBILE DEVICE EVEN WHEN LAMP IS IN THE 'OFF' POSITION. PLEASE REFER TO YOUR MOBILE DEVICE'S USER MANUAL FOR COMPATIBILITY AND CHARGING TIME. PLEASE REFRAIN FROM LEAVING YOUR DEVICE PLUGGES IN FOR LONGER THAN THE RECOMMENDED TIME, OTHERWISE IS MAY RESULT IN OVER CHARGING.

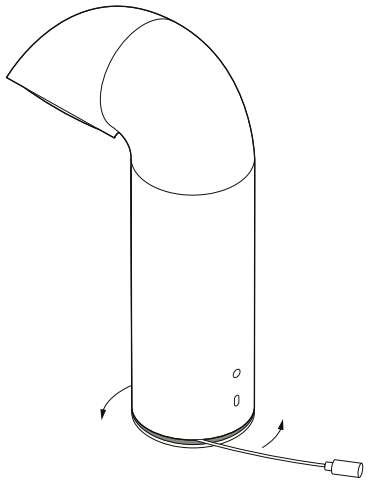


CABLE MANAGEMENT

CIRO'S CORD CAN BE SPOOLED AROUND THE BASE WHEN EXTRA LENGTH IS NOT IN-USE.

ADJUSTABILITY

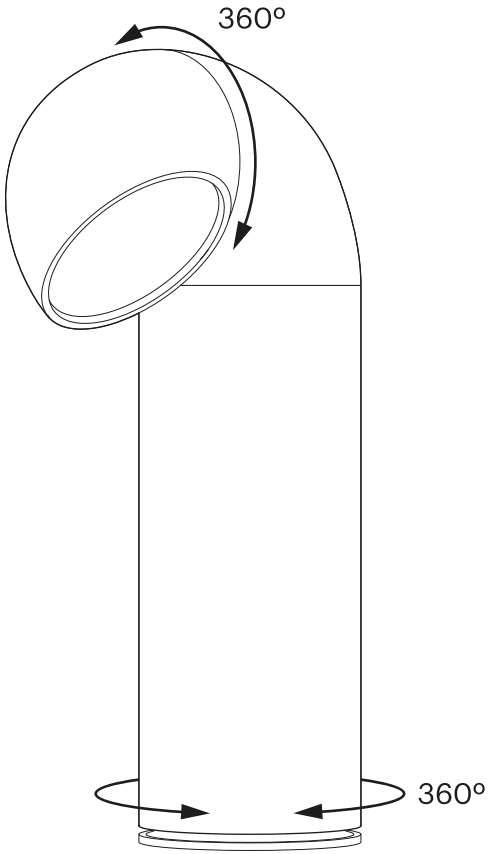

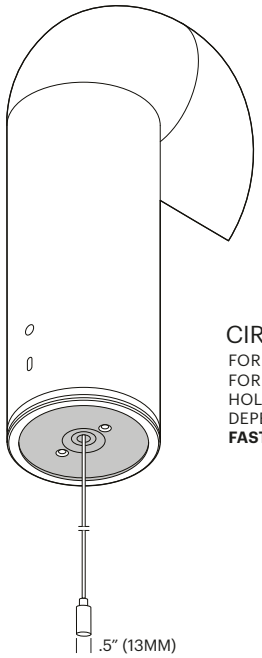

CIRO SURFACE MOUNT

FOR SURFACE MOUNT APPLICATIONS: A (.5") HOLE IS REQUIRED FOR THE CABLE CONNECTOR TO PASS THROUGH AS WELL AS 2 HOLES TO ACCOMODATE M6 MACHINE SCREWS (LENGTH WILL DEPEND ON TABLE THICKNESS). **NOTE: MAXIMUM DISTANCE FOR FASTENER INSIDE OF LAMP IS 10MM.**

